

Acrylabs Liquid Applied Roof Systems Introduces the

Island Style Roof

- ◆ Avoids roof damage from high winds and rain
- ◆ Provides attractive roof profiles
- ◆ Outstanding performance in high wind zones, coastal areas
- ◆ Designed for local contractor installation
- ◆ Developed and tested to meet TAS 125 Wind Uplift standards and TAS 100 Wind-Driven Rain requirements

A Complete Assembly for Sloped Roofs

Flexible: Reinforcement allows it to perform well under a wide range of temperature variations.

UV Resistant: Won't degrade

Reflective: Reduces the need for A/C, saving energy and money.

Waterborne materials: Safe for the environment, applicators and building occupants.

Seamless: Most failures occur at seams and joints

Renewable: Recoating after 10 to 15 years can renew the roof and warranty



PRODUCT FEATURES

- Hurricane wind and water resistant
- Easily maintained and repaired from wind-borne debris




3RD PARTY
LAB TESTED



Tested in accordance with stringent TAS 125 Wind Uplift and TAS 100 Wind-Driven Rain requirements.



before

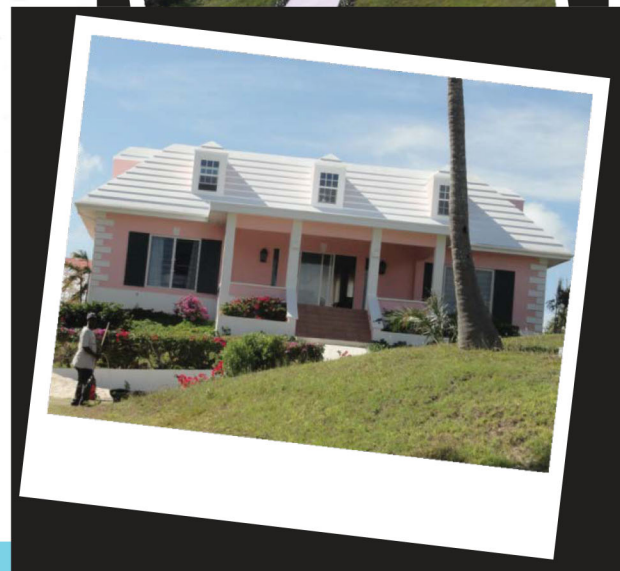

www.islandstyleroof.com

MATERIAL BENEFITS



Superior moisture resistance-will not rot, disintegrate or swell when exposed to water

Exceptional performance in all climate conditions, from -60 F to tropical environments

Impact resistant, extremely durable and dimensionally stable



Lightweight cementitious core

Excellent bond/pull-through/uplift values

High compressive strength



PermaBase may be used in 1-hour and 2-hour rated assemblies and is UL Classified.



Scores and snaps easily

PermaBase has a smoother finish than other brands and has no open edges, which reduces hand chafing.

Manufactured to ASTM C 1325



Fire Barrier meets FM Class 1 and UL Class A fire ratings for roofing systems up to unlimited slope per UL 790.

ITW fasteners recommended





Termite resistant



PermaBase® brand Cement Board is a rigid substrate made of Portland cement, aggregate and glass mesh. It has an exceptionally hard, durable surface that can withstand prolonged exposure to moisture.



Components of the System

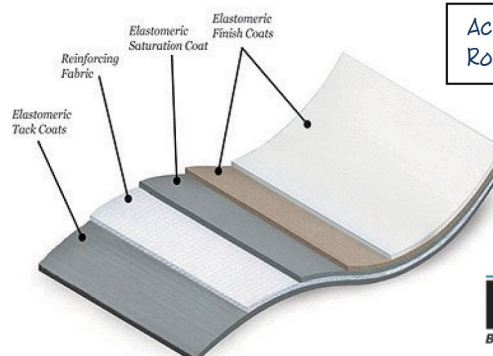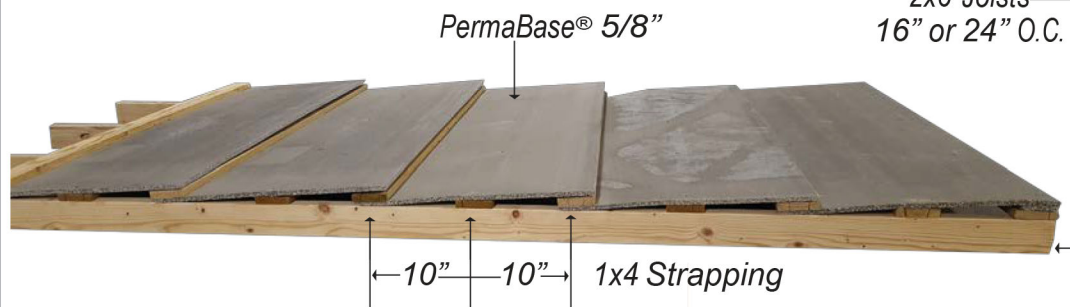

Acrylabs Composite Roof Membrane

Perma
BASE
BRAND
Cement Board

EXTERIOR
15 Year
LIMITED WARRANTY

www.islandstyleroof.com